


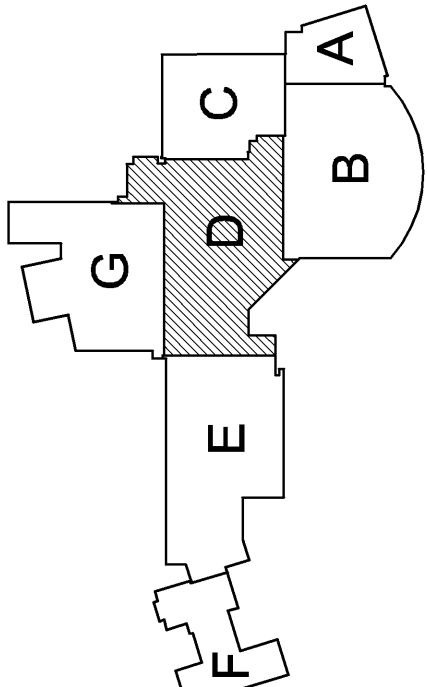

KEY PLAN

E3.14

SPECIAL SYSTEMS PLAN, MAIN LEVEL - AREA D
CREIGHTON PREPARATORY SCHOOL
FITNESS CENTER ADDITION & RENOVATION

REISSUED 04/30/08
WITH ADDENDA
CC-1 TO CC-5
ATTACHMENT NO. E3
TO ADDENDUM NO. CC-5
DATED APRIL 30, 2008

LEGEND NOTES

- GENERAL NOTES—THIS SHEET.
- SEE SHEET E3.08 FOR GENERAL NOTES.
 - PROVIDE LOW VOLTAGE SURGE PROTECTIVE DEVICES (SPD) FOR ALL CLOCKS, FIRE ALARM DATA VOICE, AND VIDEO DEVICES. REFER TO SPEC SECTION 2805.1. TYPICAL FOR ALL EXISTING COMMUNICATIONS (FIELD) & AREA D.


KEYED NOTES—THIS SHEET.

- EXISTING RELOCATED DEVICE. MOUNT AT 36" A.F.F.
- NOT USED.
- TYPICAL FA RELAY BASE FOR LOCAL RELEASE OF DOOR HOLD—OPEN.
- CEILING PROJECTOR AND CABLING INSTALLED BY OWNER.
- MULTI MEDIA OUTLET. SEE DETAIL 11/E3.3.
- TYPICAL NETWORK EQUIPMENT RACK (NCR).
- PLYWOOD BACKBOARD FOR COMMUNICATION DISTRIBUTION WALL FIELD.
- RACEWAYS FROM BELOW FOR COMMUNICATIONS BACKSHEDE CABLING. SEE UNDER LEVEL PLAN.
- PROVIDE FIVE (5) SECURITY DEVICES IN MAIN ENTRANCE DOOR MEMBER ABOVE DOOR TO ABOVE APC. SEE DETAIL 11/A3.1.
- NOT USED.
- FIRE ALARM REMOTE ANNUNCIATOR WITH MICROPHONE.
- INTERCOM MASTER STATION. VERIFY LOCATION WITH OWNER.
- DICT SPEEDER FOR EMERGENCY LAMP AND TEST SWITCH MOUNTED ON WALL LABEL WITH UNIT SERVED.
- SOUND CONTROL. SEE DETAIL 55/E3.3. 2-GANG OUTLET BOX WITH 1-GANG MID RING AND 3/4" C. TO OUTLET BOX BELOW.
- MUSIC INHIBIT RECEPTACLE. 2-GANG OUTLET BOX WITH 1-GANG MID RING AND 3/4" C. TO OUTLET BOX ABOVE.
- LOBBY SOUND CONTROL ENCLOSURE INSTALL 3/4" C. TO LOBBY SOUND CONTROL RECEPTACLE. SEE DETAIL 55/E3.3 and 55/E3.3.
- DOUBLE-GANG OUTLET BOX WITH SINGLE-GANG MID RING FOR MICROPHONE RECEPTACLE. SEE DETAIL 56/E3.3.
- FIRE ALARM RELAY FOR MOUNTING OF SOUND SYSTEM DURING FA SOUND SYSTEM. COORDINATE LOCATION AND CONNECTION WITH SOUND SYSTEM.
- WALL-MOUNTED SWING-OUT SOUND SYSTEM RACK. SEE DETAIL 55/E3.3.
- OWN ADD FEED TO LOBBY. INSTALL (1)-3/4" C. FROM OWN MAIN SOUND SYSTEM RACK IN RM 101.
- CONNECTION TO BUILDING INTERCOM SYSTEM. COORDINATE RACEWAY OUT AND DESTINATION WITH INTERCOM SYSTEM.
- ADVISE 200 VOLT POWER. CONNECT THROUGH LOCAL RELAY. CONTRACTOR'S OPTION TO REPLACE MAG DOOR HOLD SUPPLY WITH LOW VOLTAGE TYPE AND POWER FROM FA POWER SUPPLY.
- EXISTING SMOKE DAMPER PROVIDE DICT DETECTOR AND CONNECT TO FIRE ALARM SYSTEM PER GENERAL NOTE "D".
- INSTALL EXISTING DEVICE IN NEW CEILING.
- DEVICE MOUNTED IN CASWORK. PROVIDE RACEWAY TO J-BOX AND PATHWAY TO ABOVE CEILING.
- SURFACE MOUNTED LOW PROFILE INTERCOM HORN PROVIDE 3/4" C. BETWEEN SPEAKER AND TO ABOVE NEAREST APC.

NOTE:
INTERCOM SYSTEM. EQUIPMENT, MATERIALS AND LABOR OF THIS SYSTEM WILL BE PROVIDED BY OWNER. RACEWAY, BONES, POWER AND ASSOCIATED ELECTRICAL WORK SHALL BE PROVIDED BY ELECTRICAL CONTRACTOR. CONTRACTOR SHALL REMOTE EXISTING DEVICES AND DEVICES AND CHANGE EXISTING DEVICES SHALL NOT BE REMOVED UNTIL CONTRACTOR HAS BEEN ADVISED BY OWNER. CONTRACTOR SHALL PROVIDE OWNER WITH REPAIRS AND OTHER REQUIREMENTS OF REPAIRMENT SYSTEM PROVIDED BY OWNER.
CLOCK SYSTEM. EQUIPMENT, MATERIALS AND LABOR OF THIS SYSTEM WILL BE PROVIDED BY OWNER. RACEWAY, BONES, POWER AND ASSOCIATED ELECTRICAL WORK SHALL BE PROVIDED BY ELECTRICAL CONTRACTOR. CONTRACTOR SHALL REMOTE EXISTING DEVICES AND DEVICES AND CHANGE EXISTING DEVICES SHALL NOT BE REMOVED UNTIL CONTRACTOR HAS BEEN ADVISED BY OWNER. CONTRACTOR SHALL PROVIDE OWNER WITH REPAIRS AND OTHER REQUIREMENTS OF REPAIRMENT SYSTEM PROVIDED BY OWNER.
SOUND SYSTEMS. EQUIPMENT, MATERIALS AND LABOR OF THIS SECTION WILL BE PROVIDED BY OWNER. RACEWAY, BONES, POWER AND ASSOCIATED ELECTRICAL WORK SHALL BE PROVIDED BY ELECTRICAL CONTRACTOR. CONTRACTOR SHALL REMOTE EXISTING DEVICES AND DEVICES AND CHANGE EXISTING DEVICES SHALL NOT BE REMOVED UNTIL CONTRACTOR HAS BEEN ADVISED BY OWNER. CONTRACTOR SHALL PROVIDE OWNER WITH REPAIRS AND OTHER REQUIREMENTS OF REPAIRMENT SYSTEM PROVIDED BY OWNER.
MOUNTING, DRAWINGS AND SIGNATURES SHALL BE MODIFIED BY CONTRACTOR SUBSEQUENT TO RECEIPT OF WORKER BY A.H.U.



SPECIAL SYSTEMS PLAN, MAIN LEVEL - AREA D



SCALE: 1/8" = 1'-0"